



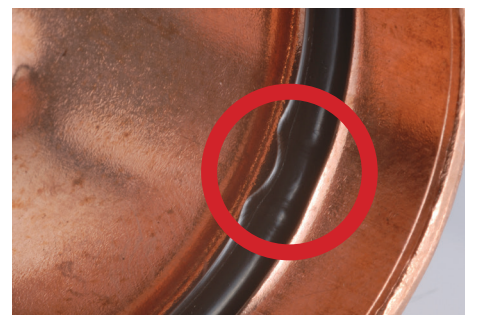
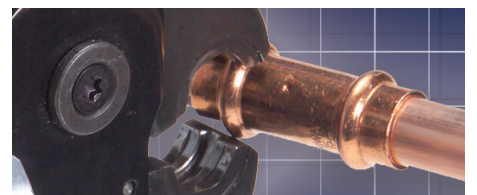
The >B< Press range is an innovative press system which guarantees both a secure joint and a quick and simple installation.

Features and Benefits:



- Available in copper and red brass fittings.
- Compatible with various press tools and jaws.*
- >B< Press is quick and simple to install, saving time and money.
- Flame free installation for ensuring on site safety.
- >B< Profile 3 point press ensures a leak free, secure and permanent joint.
- Available in 15mm to 108mm.
- Suitable for use with hard, half-hard and soft copper tubes to EN 1057.
- Manufactured and designed to BS 8537 copper tube press fittings.
- Designed with a mechanical hexagonal press form which indicates fittings has been secured ensuring no joint rotation.
- >B< Press has a high quality O-Ring material that forms a secure leak free joint when pressed.*
- Leading edge design ensures the chances of damaging the O-Rings are reduced during installation.

*Please see compatibility list on website for more details

*Only available on sizes 15-54mm



>B< Press Copper Range with Press Indicators

Straight Coupler  P1 (P5270) From: 15mm To: 108mm	Reduced Straight Coupler  P1R (P5240) From: 22 x 15mm To: 54 x 42mm	Slip Coupler  P1S (P4275) From: 15mm To: 108mm	Female Straight Connector  P2 (P4270G) From: 15 x 1/2" To: 54 x 2"	Male Straight Connector  P3 (P4243G) From: 15 x 1/2" To: 76 x 3"	90° Elbow  P12 (P5002) From: 15mm To: 54mm
90° Elbow  P12 (4090) From: 67mm To: 108mm	90° Street Elbow  P12S (P5001) From: 15mm To: 54mm	90° Street Elbow Gunmetal  P12S (P4092) From: 67mm To: 108mm	Fitting Reducer  P6 (P5243) From: 15 x 12mm To: 108 x 89mm	90° Bend with Male Thread  P13 (P4001G) From: 15 x 1/2" To: 54 x 2"	90° Elbow with Female Thread  P14 (P4090G) From: 15 x 1/2" To: 54 x 2"
Return Bend  P20 (P5060) Size: 22mm	45° Obtuse Elbow  P21 (P5041) From: 15mm To: 108mm	45° Obtuse Street Elbow  P21S (P5040) From: 15mm To: 108mm	Tee Equal  P24 (P5130) From: 15mm To: 108mm	Tee Reduced Branch  P25 (P5130) From: 22 x 22 x 15mm To: 108 x 108 x 89mm	Tee Reduced End  P26 (P5130) From: 22 x 15 x 22mm To: 28 x 22 x 28mm
Tee Reduced End & Branch  P27 (P5130) From: 22 x 15 x 15mm To: 54 x 42 x 42mm	Reduced Both Ends  P28 (P5130) From: 15 x 15 x 22mm To: 22 x 22 x 28mm	Tee with Female Threaded Branch  P30 (P4130G) From: 15 x 15 x 1/2" To: 108 x 108 x 2"	Male Straight Union Connector  P69M (P6917) From: 15 x 1/2" To: 54 x 2"	Female Straight Union Connector  P69F (P4330G) From: 15 x 1/2" To: 54 x 2"	PN16 Flange (4/8 hole)  P4230B From: 67mm To: 108mm
Stop End  P61 (P5301) From: 15mm To: 108mm	<ul style="list-style-type: none"> • Specifically designed EPDM O-Ring making >B< Press suitable for applications including HVAC, compressed air and potable water applications. • Available in sizes 15 – 108mm. • Designed for hydrostatic water pressure up to 16 bar. • Designed for temperature ranges of -35°C to 110°C. • Fully tested to 64 bar pressures and approved by WRAS, KIWA and DVGW. • Patented design. 				



*Conex | Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.
 Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

an IBP GROUP company